Asus V6800V Hard Drive Replacement

replacing hardware


Written By: Jong Park



TOOLS:

- Phillips #0 Screwdriver (1)
- iFixit Opening Tools (1)

Step 1 — Hard Drive

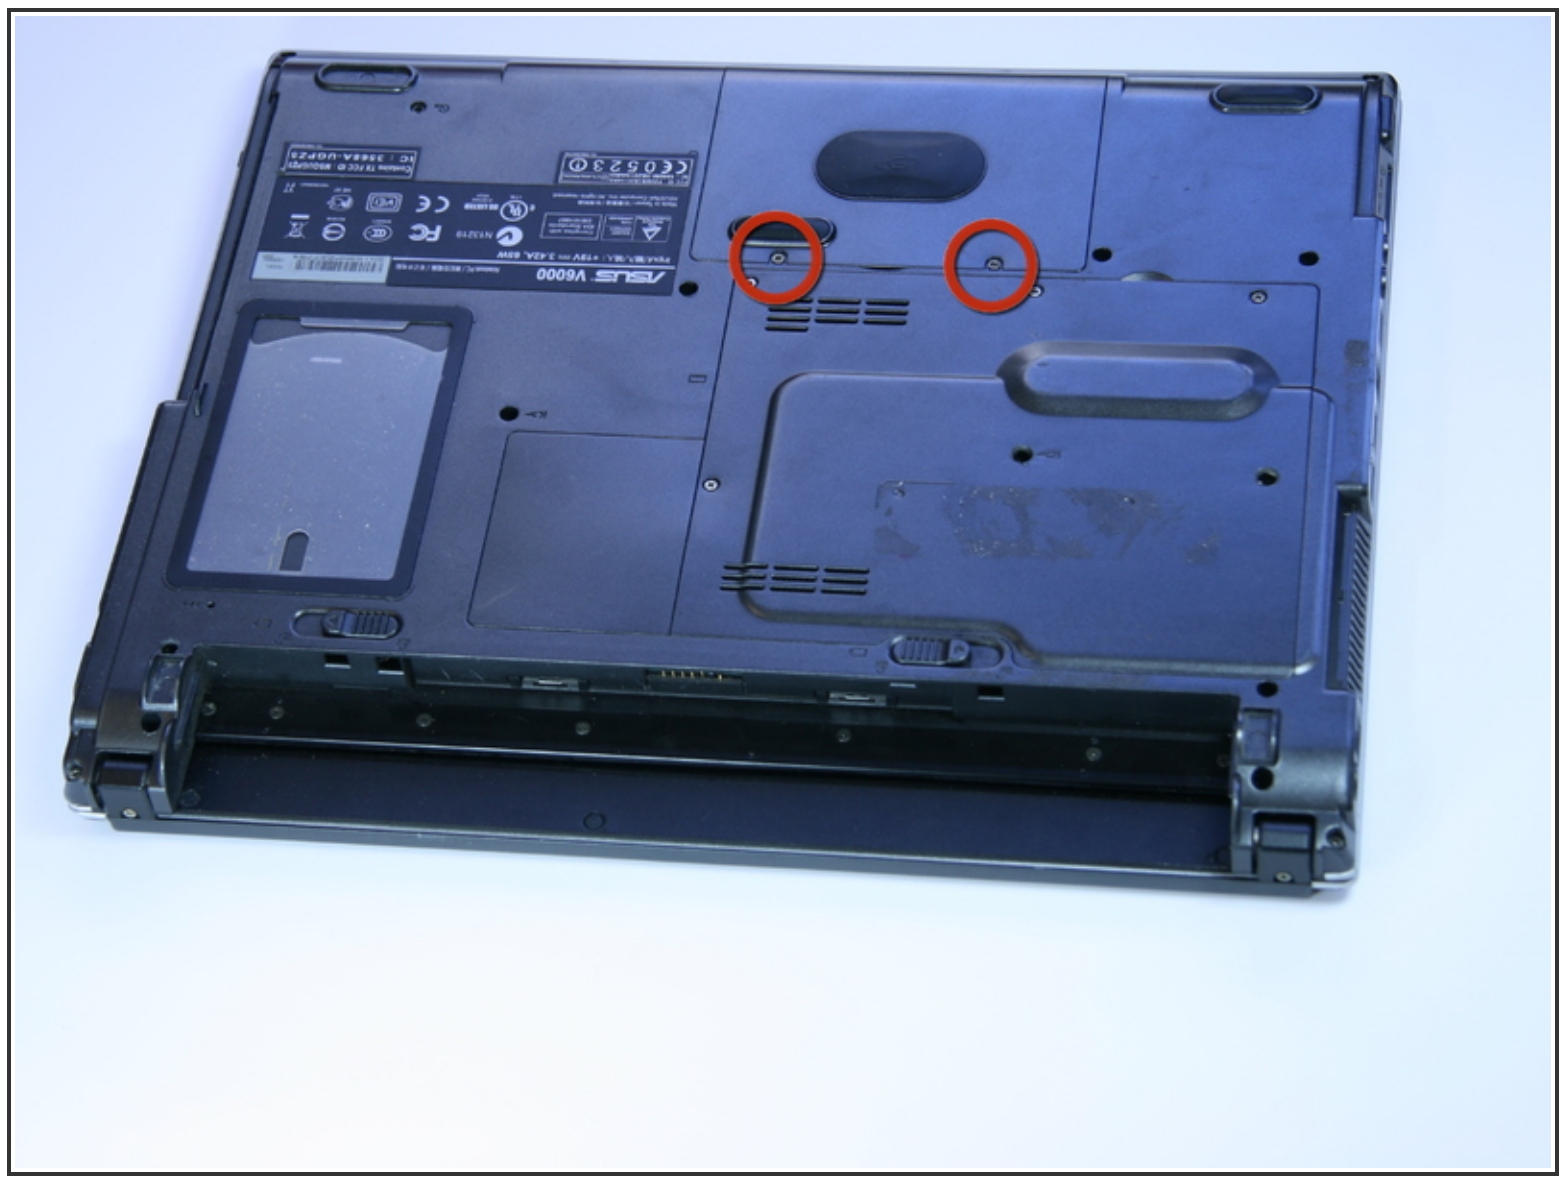



- Remove the two highlighted screws.

Step 2







- Pry open case at highlighted area.

ⓘ Actual hard drive is not shown in the image.

Step 3

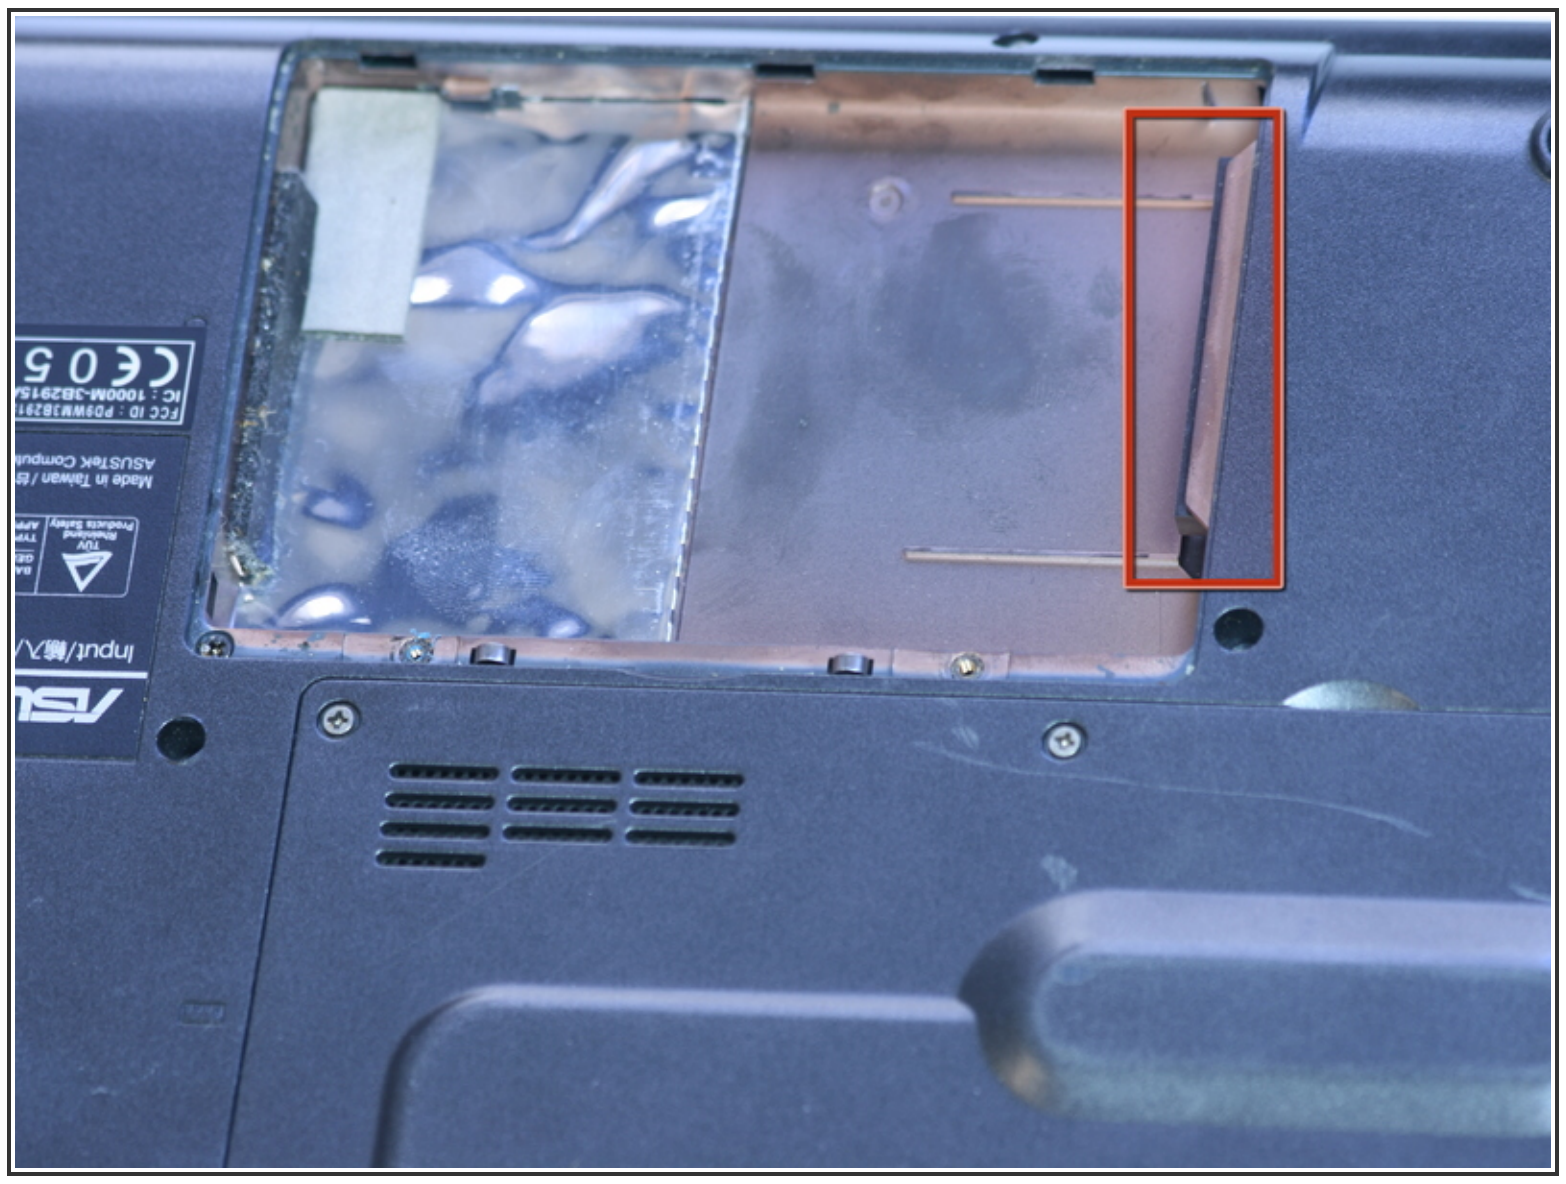

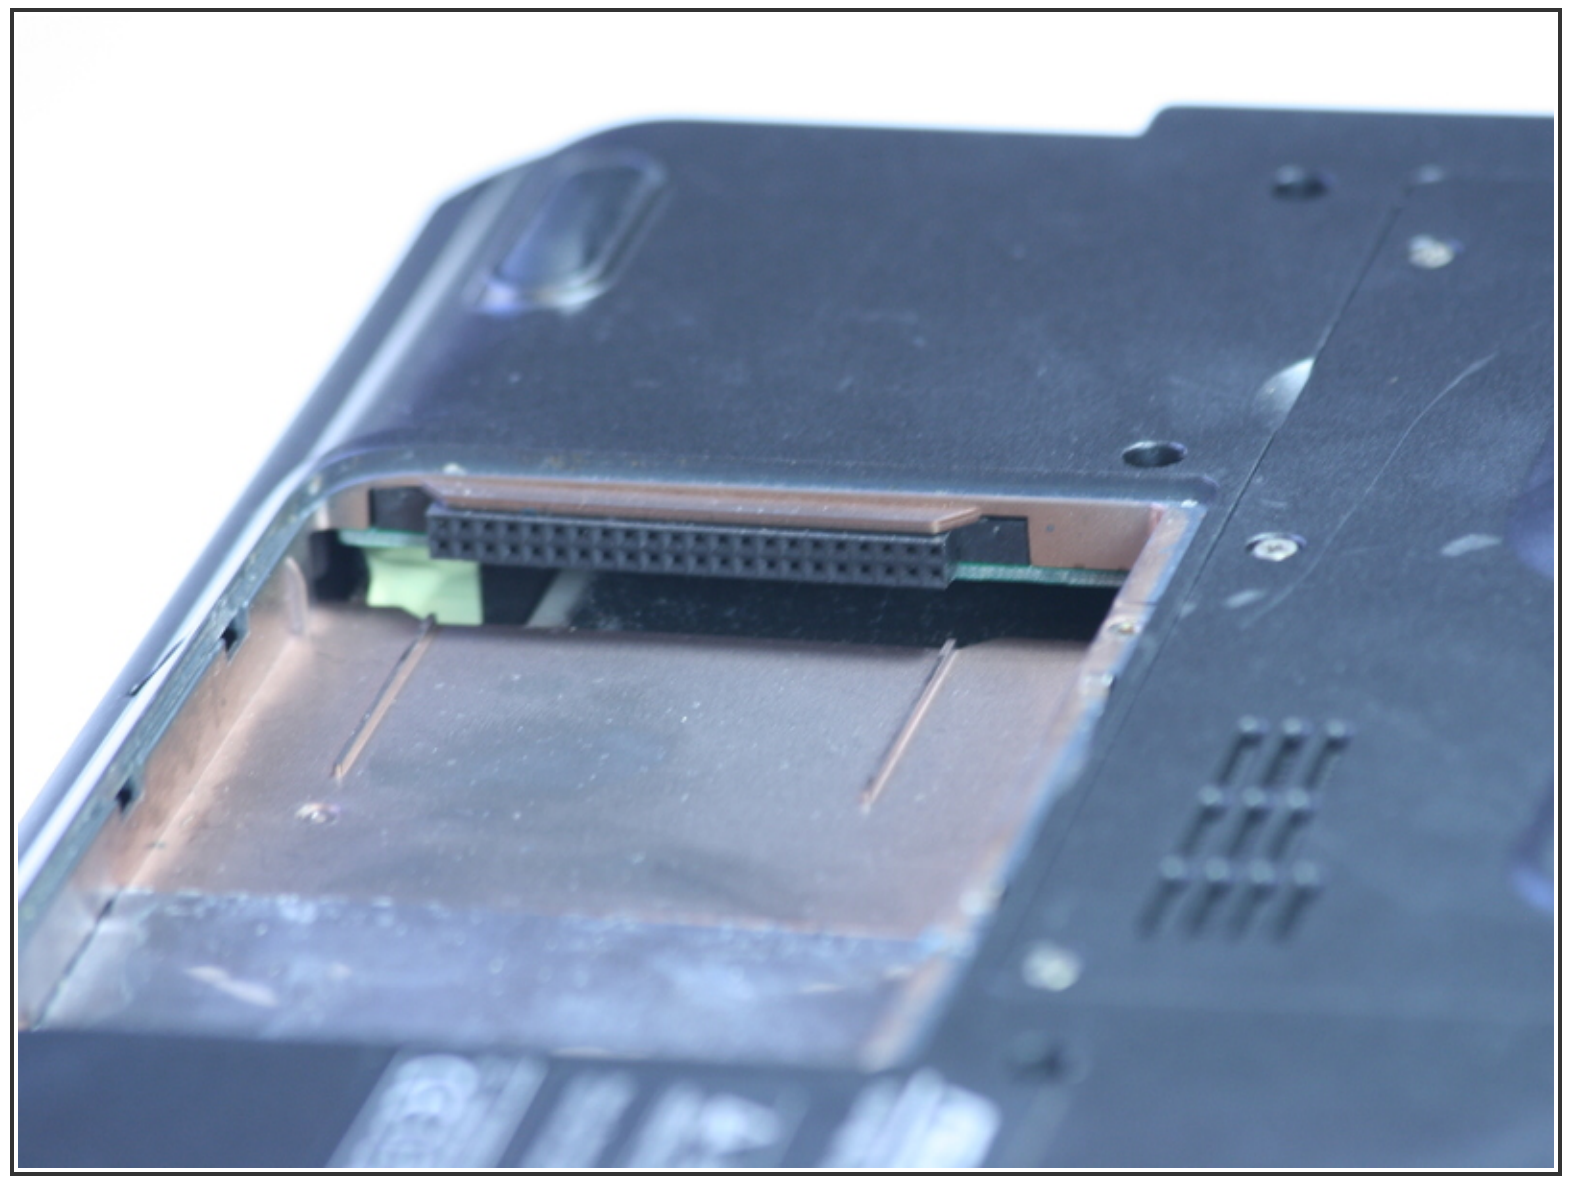

- Pull out hard drive laterally from slot shown.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-07 01:28:50 AM.